



- 3x380 V AC
- PTO ¹⁾
- 2
- 2
- 2
- M
- e
- IP 55

MO 3

093.	x	-	x	x	x	x	x	x	/	x	x
-------------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------	----------

O	/	o	e	10)		↓
3.1			-20 °C ... +60 °C	C3	IP 55	0
					IP 67	1
2	+		-20 °C ... +60 °C	C4	IP 67	2
2			-50 °C ... +40 °C	C3	IP 55	4
					IP 67	3
2			-20 °C ... +60 °C	C3	IP 55	5
					IP 67	6
1	-		-50 °C ... +40 °C	C4	IP 67	7
2			-60 °C ... +60 °C	C3	IP 55	9
					IP 67	8

	25)		↓
	Y/D 380 V AC	Z279c	0
	Y/D 400 V AC	Z279c	1
	Y/D 380 V AC -	Z297b	2
	Y/D 400 V AC -	Z297b	3
	230 V AC -	-	9
	220 V AC -	-	L
21)	Y/D 380 V AC	ZK279c	5
	Y/D 400 V AC	ZK279c	6
	Y/D 380 V AC -	ZK297b	4
	Y/D 400 V AC -	ZK297b	7
	230 V AC -	-	8
	220 V AC -	-	P

31)	-		33)	3x400 V, 50Hz ³⁴⁾			↓
	«	-		»			
25 - 45 Nm	27 Nm	18 Nm	10 min ⁻¹	180 W	800 min ⁻¹	0.84 A	A
			16 min ⁻¹	250 W	1 365 min ⁻¹	0.80 A	D
			25 min ⁻¹	250 W	1 365 min ⁻¹	0.80 A	J
			40 min ⁻¹	370 W	1 350 min ⁻¹	1.80 A	Q
			63 min ⁻¹ ³⁶⁾	370 W	1 350 min ⁻¹	1.08 A	R
			90 min ⁻¹ ³⁶⁾	1100 W	2 840 min ⁻¹	2.45 A	T
45 - 90 Nm	54 Nm	36 Nm	10 min ⁻¹	180 W	800 min ⁻¹	0.84 A	B
			16 min ⁻¹	250 W	1 365 min ⁻¹	0.80 A	E
			25 min ⁻¹	370 W	1 350 min ⁻¹	1.08 A	L
			40 min ⁻¹	370 W	1 350 min ⁻¹	1.08 A	P
			60 min ⁻¹ ³⁶⁾	750 W	1 385 min ⁻¹	1.85 A	U
			95 min ⁻¹ ³⁶⁾	750 W	1 385 min ⁻¹	1.85 A	K
90 - 150 Nm	90 Nm	60 Nm	10 min ⁻¹	180 W	800 min ⁻¹	0.84 A	H
			16 min ⁻¹	370 W	1 350 min ⁻¹	1.08 A	G
			25 min ⁻¹	370 W	1 350 min ⁻¹	1.08 A	N
			40 min ⁻¹	550 W	900 min ⁻¹	1.68 A	M
			60 min ⁻¹ ³⁶⁾	750 W	1 385 min ⁻¹	1.85 A	2
			95 min ⁻¹ ³⁶⁾	1 500 W	2 830 min ⁻¹	3.15 A	Y
130 - 250 Nm ³⁵⁾	150 Nm	100 Nm	10 min ⁻¹	370 W	915 min ⁻¹	1.23 A	3
			16 min ⁻¹	750 W	1 385 min ⁻¹	1.85 A	4
			25 min ⁻¹	750 W	1 385 min ⁻¹	1.85 A	5
			50 min ⁻¹	1 100 W	1 440 min ⁻¹	2.50 A	6

093. x - x x x x x / x x

		44)		
	S1/S2 S3/S4 S5/S6	1 ÷ 3	1.75; 3	Z403a+Z41a ZK403a+ZK41a
		2.5 ÷ 685	5.7; 10.5; 19; 34; 63; 113; 206; 375; 685	
	S1/S2, S3/S4 ^c S13/S14	1 ÷ 3	1.75; 3	Z461f+Z41a ZK461f+ZK41a
		2.5 ÷ 685	5.7; 10.5; 19; 34; 63; 113; 206; 375; 685	
46)	S1/S2 S3/S4 S5/S6	1 ÷ 3	1.75; 3	Z575+Z41a ZK575+ZK41a
		2.5 ÷ 685	5.7; 10.5; 19; 34; 63; 113; 206; 375; 685	
	S1/S2, S3/S4 ^c S13/S14	1 ÷ 3	1.75; 3	Z575a+Z41a ZK575a+ZK41a
		2.5 ÷ 685	5.7; 10.5; 19; 34; 63; 113; 206; 375; 685	

		-	-	-	A	
		-	1 x 100 W	Z5c / ZK5c	B	
			1 x 2 000 W		F	
		-	2 x 100 W	Z6c / ZK6c	K	
			2 x 2 000 W		P	
R/I ⁵¹⁾	2-	-	4 - 20 mA	Z10g / ZK10g	S	
			0 - 20 mA		T	
			4 - 20 mA		Z257b ZK257b	V
			0 - 5 mA			Y
	3-	-	4 - 20 mA	Z269r / ZK269r	Q	
			0 - 20 mA		U	
			4 - 20 mA		Z260h / ZK260h	W
			0 - 5 mA			Z
R/U ⁵¹⁾	3-	-	0 - 10 V	Z257m / ZK257m	D	
			0 - 10 V		R	
CPT ⁵¹⁾⁵²⁾	2-	-	4 - 20 mA	Z10g / ZK10g	I	
			0 - 5 mA		Z257n / ZK257n	5
	3-	-	4 - 20 mA	Z269r / ZK269r	J	
			0 - 5 mA		Z260m / ZK260m	6
DCPT 3M ⁵¹⁾⁵²⁾	2-	-	4 - 20 mA	Z10g / ZK10g	2	
			4 - 20 mA		Z269r / ZK269r	3

e	Ø80 ⁶¹⁾	4-	Z30°+M60° - Ø28/Ø40	P-1102/01	A	
			Z30°+M60° - Ø28/Ø40		B	
			Z45°+M45° - Ø28/Ø40		0	
			Z45°+M45° - Ø35/Ø52		J	
	ISO 5210	F10	B3	Ø20	P-1102/04	C
		F10	C	14/Ø28/Ø40	P-1103/01	D
				14/Ø35/Ø52		H
	ISO 5210	F10 ⁶¹⁾	D	Ø20	P-1103/02	E
	ISO 5210	F14	4-	Z45°+M45° - Ø35/Ø52	P-2029	N
				Ø30		P-2067
20/Ø35/Ø52				P-2023		R
Ø30				P-2024		S
e o	F10 ⁶²⁾	A	Max. TR26	P-1848	F	
			Max. TR32		P-2027/B	M
			Ø42/Ø28/50		P-1849/A	G
			Ø42/Ø35/50		P-1849/B	Q
	F14	A	Max. TR32	P-2027/A	T	
			Ø60/Ø35		P-2028/B	V
			Ø45/Ø35		P-2028/A	U
			20/Ø28/Ø60		P-1853	K
	55510-2013	Ø104/4xØ15/Ø70 ⁶²⁾		□ 19x19	P-1376b1	4
				Ø28/Ø46		P-1376b2
Ø32/Ø46				P-1376b2		7
	Ø135/4xØ13/Ø108		Ø35/Ø59	P-2066/A	6	


093. x - x x x x x x / x x


			↓	↓
	3	34	-	0 1
B			-	0 3
C			-	0 4
F	PTC, 150 °C		Z279h / ZK279h Z297g / ZK297g	0 5
H	e		-	4 0
: B+C=06, B+F=07, B+H=41, B+C+H=44, C+H=42, C+F=08, B+C+F=09				

- 1) 150°C.
- 10) ISO 9223 / EN ISO 12944-2.
- 21) -40 °C.
- 25) (3x500; 3x480; 3x415 V AC).
- 31)
- 32) 1.3
- 33) S2-10 min a S4-25% 90 /
- 34) S4-25%, 90 1200 /
- 35) 60
- 36) A F10.
- 44) S3, S4
- 46) M -40°C.
- 51) -60°C.
- 52) CPT - DCPT -
- 61) .80
- 62) .100
















MO 3



P

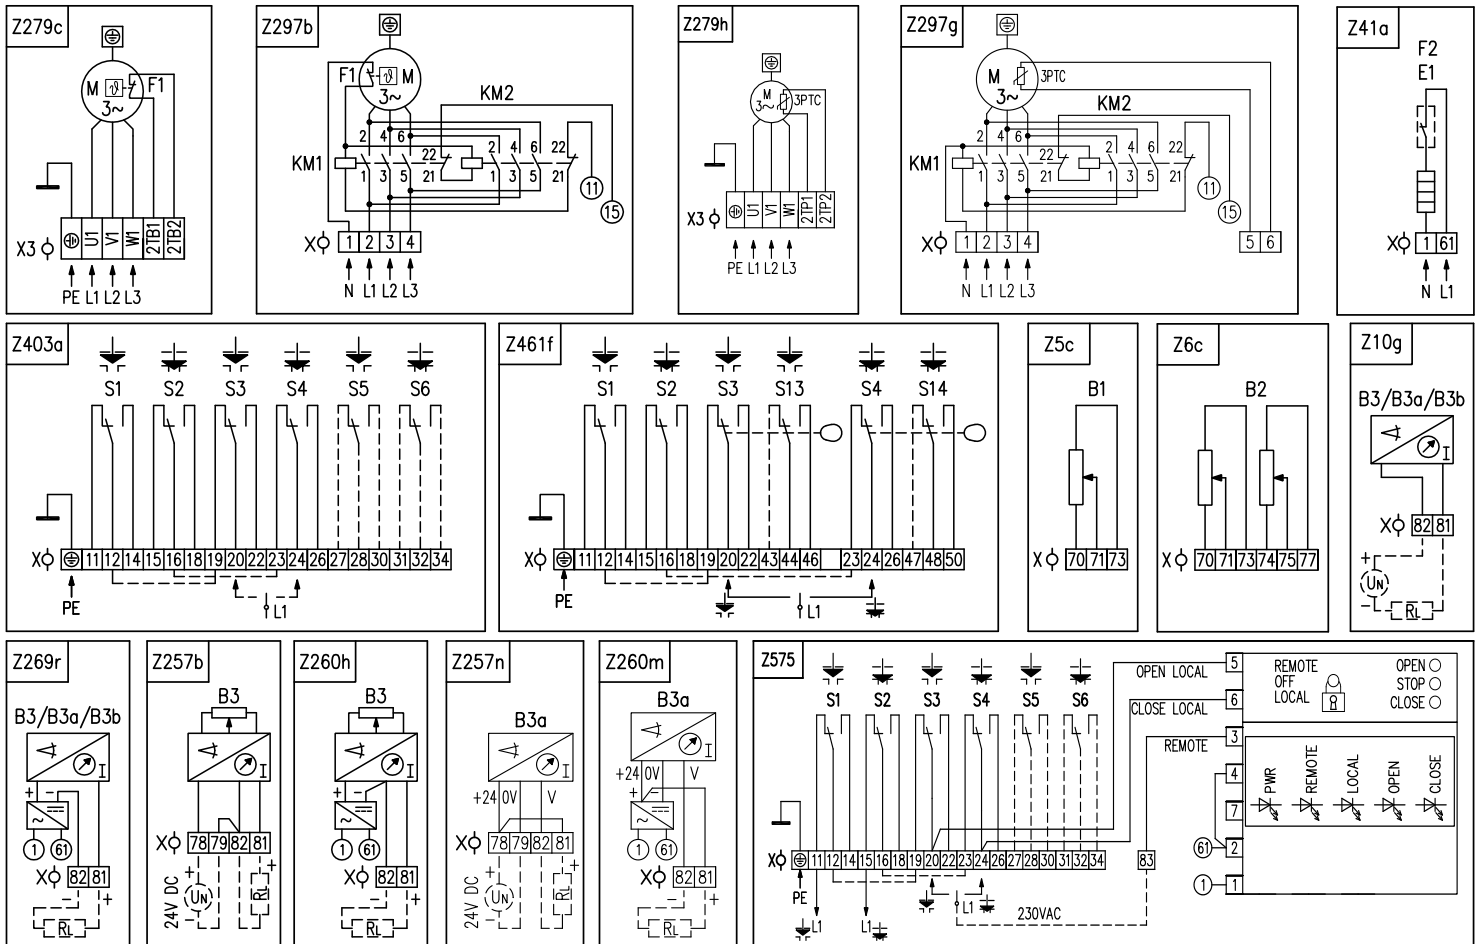

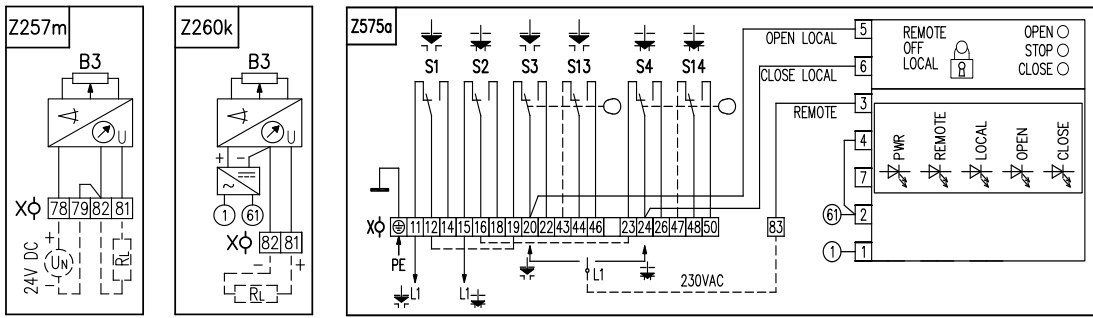

) 2 : M25x1,5 12,5 19 mm, (X) 32
 . 2,5 mm²
) M25x1,5 x : 12,5 19 mm

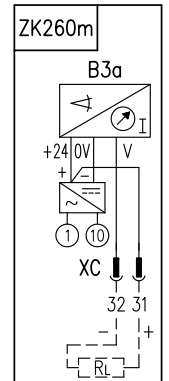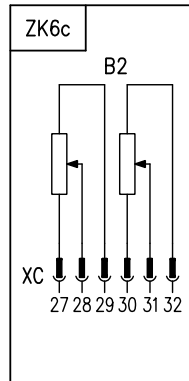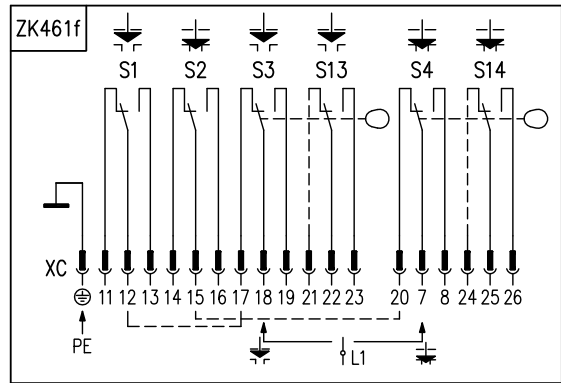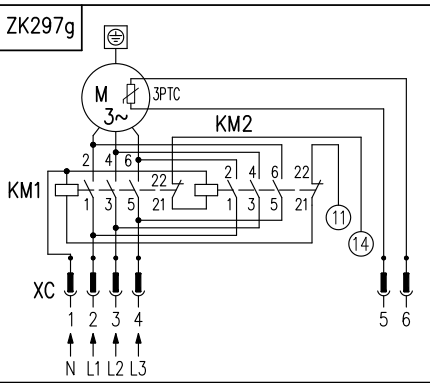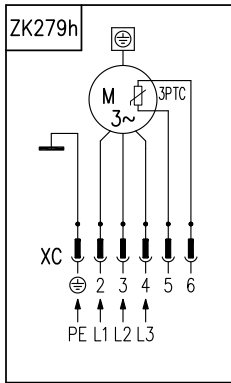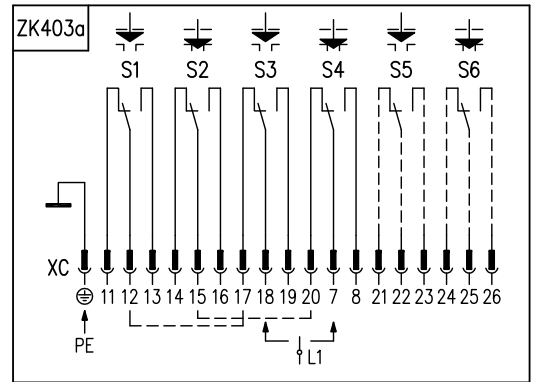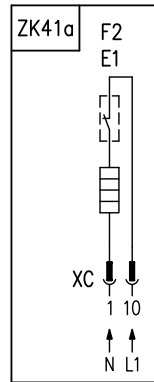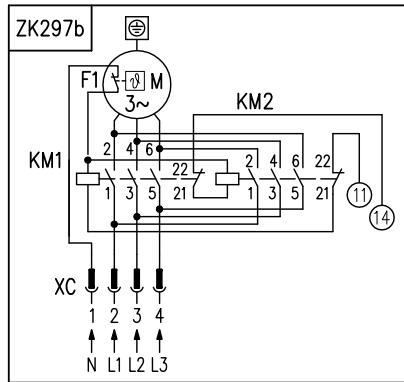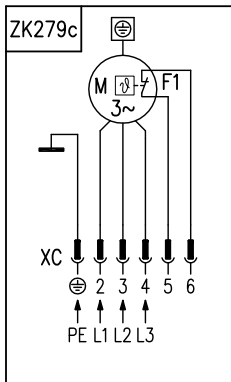

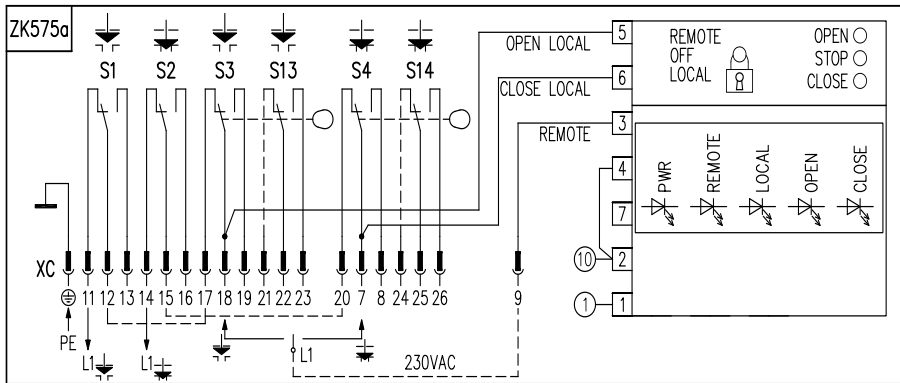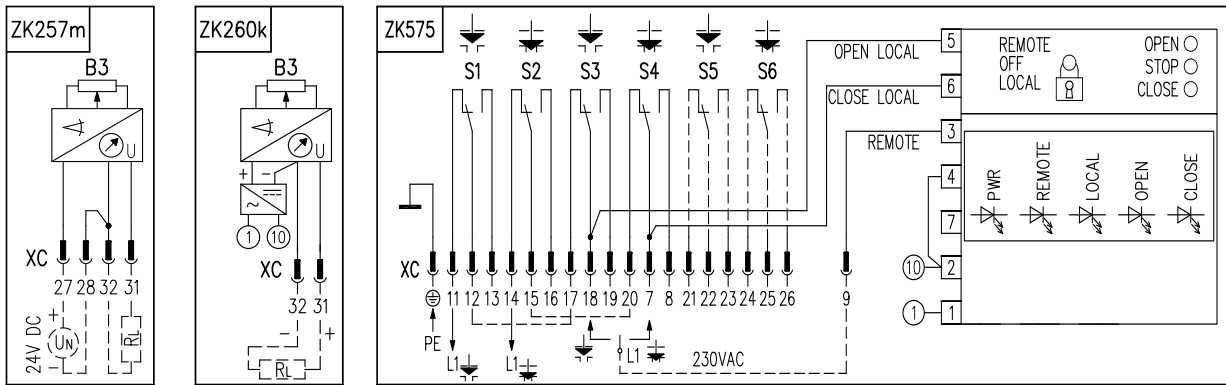


(XC): 8 14,5 M25x1,5 mm - 12,5 19 mm.
 : M20x1,5 - x 0,5 mm².

Z5c/ZK5c					
Z6c/ZK6c					
Z10g/ZK10g					CPT DCPT 3M - 2-
Z41a/ZK41a					
Z257b/ZK257b					
Z257m/ZK257					
Z257n/ZK257n					
Z260h/ZK260h					
Z260k/ZK260k					
Z260m/ZK260m					
Z269r/ZK269r					CPT, 3-
Z279c/ZK279c					
Z279h/ZK279h					
Z297b/ZK297b					
Z297g/ZK297g					
Z403a/ZK403a					
Z461f/ZK461f					
Z575/ZK575					
Z575a/ZK575a					

B1	p				
B2	p				
B3					
B3a					
B3b					
E1					
F1					
F2					
I					
U					
KM1, KM2	e				
M					
PTC/PTO	a	a			
R _L					
REMOTE-OFF-LOCAL					
OPEN-STOP-CLOSE					
S1					
S2					
S3					
S4					
S5					
S6					
S13					
S14					
X					
X3					
XC					


3

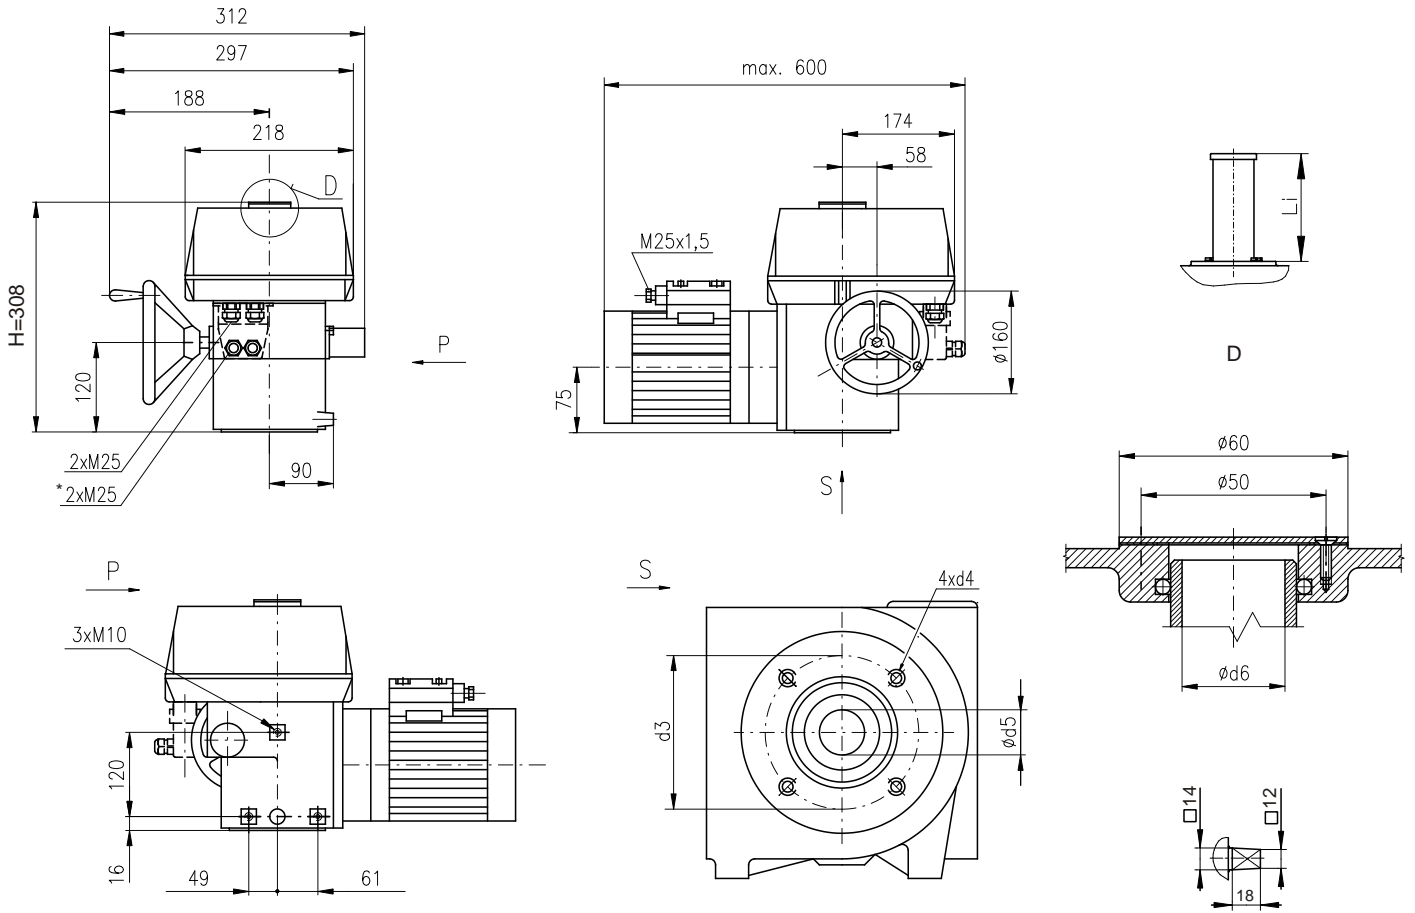

* Li -


d3, d5, d6, ...

P-1012d

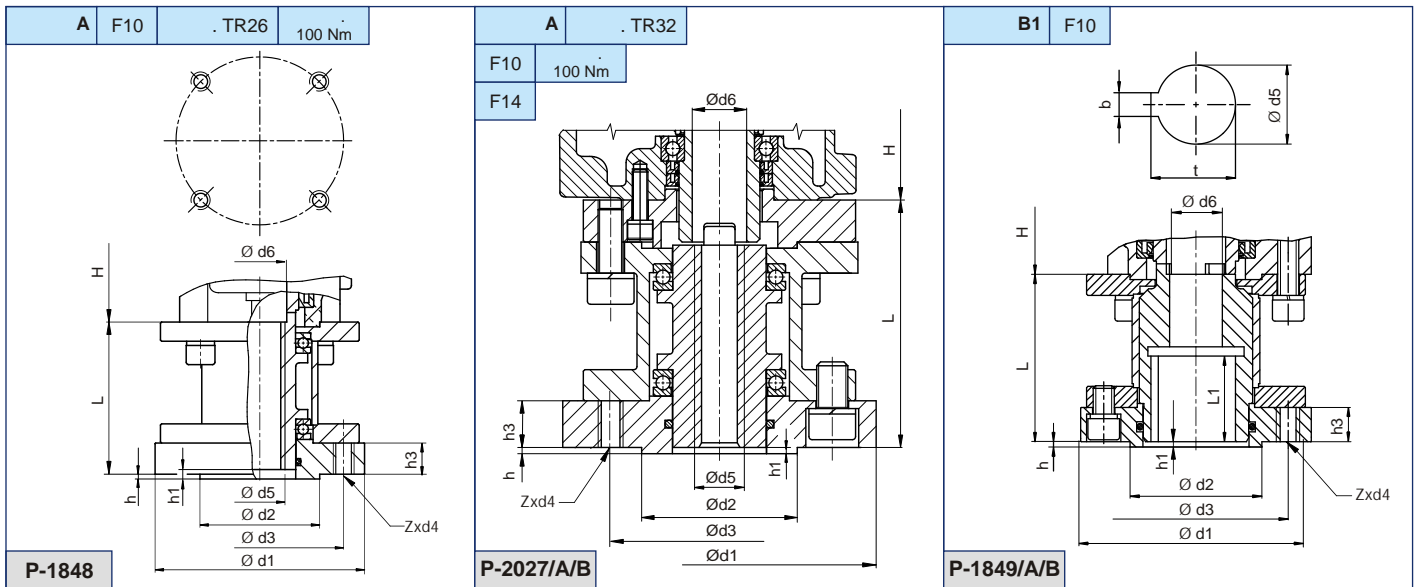


P-1849/B	B1	F10	12	125	70	102	4xM10	42	35	3	4	17	80	50	45.3
P-1849/A	B1	F10	12	125	70	102	4xM10	42	28	3	4	17	80	50	45.3
P-1849	B1	G0	12	125	60	102	4xM10	42	28	3	3	26	80	50	45.3
P-2027/A	A	F14	-	175	100	140	4xM16	max. TR 32	35	4	4	26	127	-	-
P-2027/B	A	F10	-	125	70	102	4xM10	max. TR 32	35	4	4	26	127	-	-
P-1848	A	F10	-	125	70	102	4xM10	max. TR 26	28	3	8	17	80	-	-
P-1848	A	G0	-	125	60	102	4xM10	max. TR 26	28	3	8	17	80	-	-
			b	d1	d2	d3	Zxd4	d5	d6	h	h1	h3	L	L1	t

d5

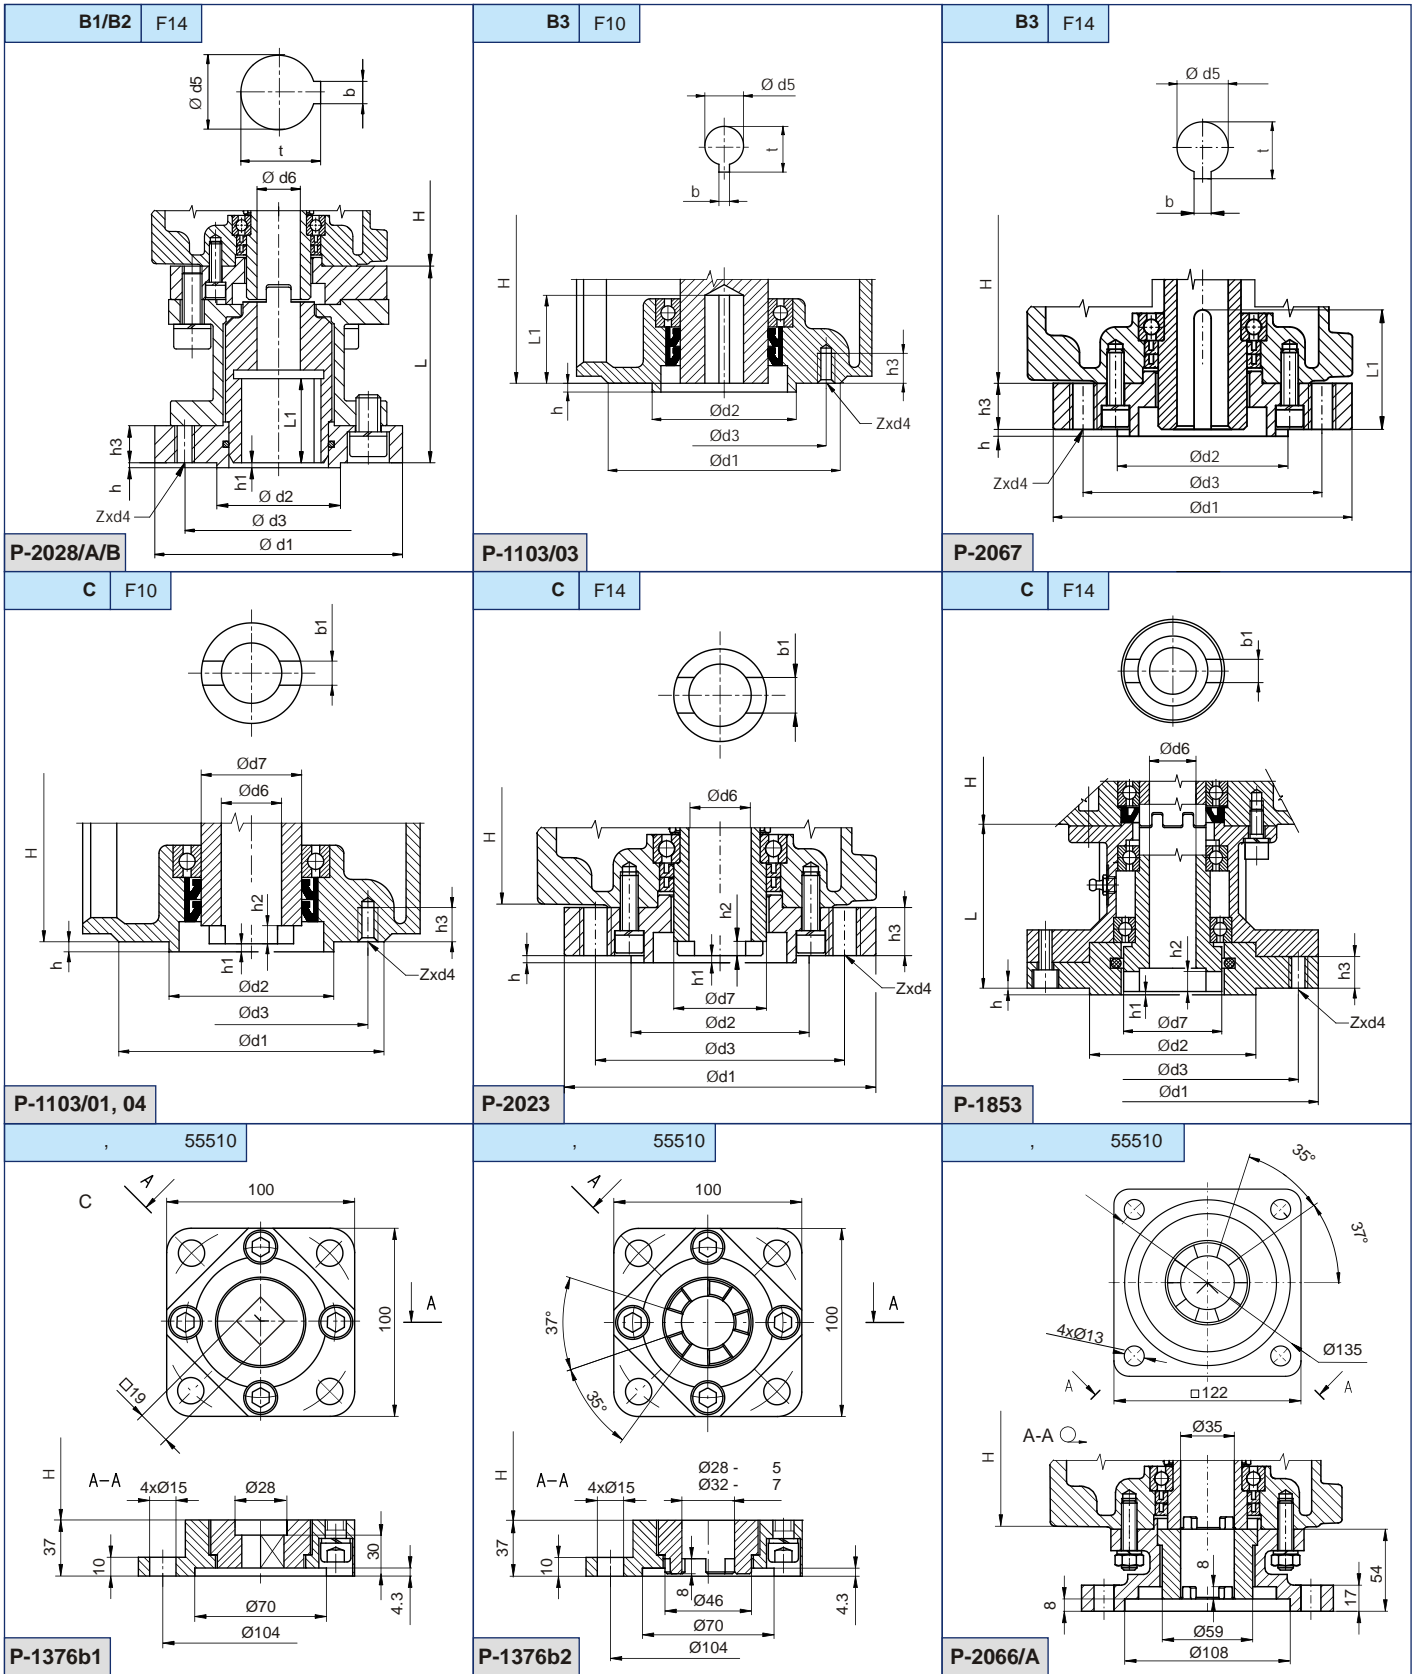

P-1853	C	F14	-	20	175	100	140	4xM16	-	28	60	4	2	10	27	-	-	-	
P-2023	C	F14	-	20	175	100	140	4xM16	-	35	52	4	4	8	27	-	-	-	
P-1103/01	C	F10	-	14	125	70	102	4xM10	-	35	52	3	4	10	27	-	-	-	
P-1103/01	C	F10	-	14	125	70	102	4xM10	-	28	40	3	2	10	12.5	-	-	-	
P-2067	B3	F14	8	-	175	100	140	4xM16	30	-	-	4	-	-	27	-	69	33.3	
P-1103/03	B3	F10	6	-	125	70	102	4xM10	20	-	-	-	-	-	12.5	-	55	22.8	
P-2028/A	B2	F14	14	-	175	100	140	4xM16	45	35	-	4	4	-	30	154	60	64.4	
P-2028/B	B1	F14	18	-	175	100	140	4xM16	60	35	-	4	4	-	30	154	60	64.4	
				b	b1	d1	d2	d3	Zxd4	d5	d6	d7	h	h1	h2	h3	L	L1	t

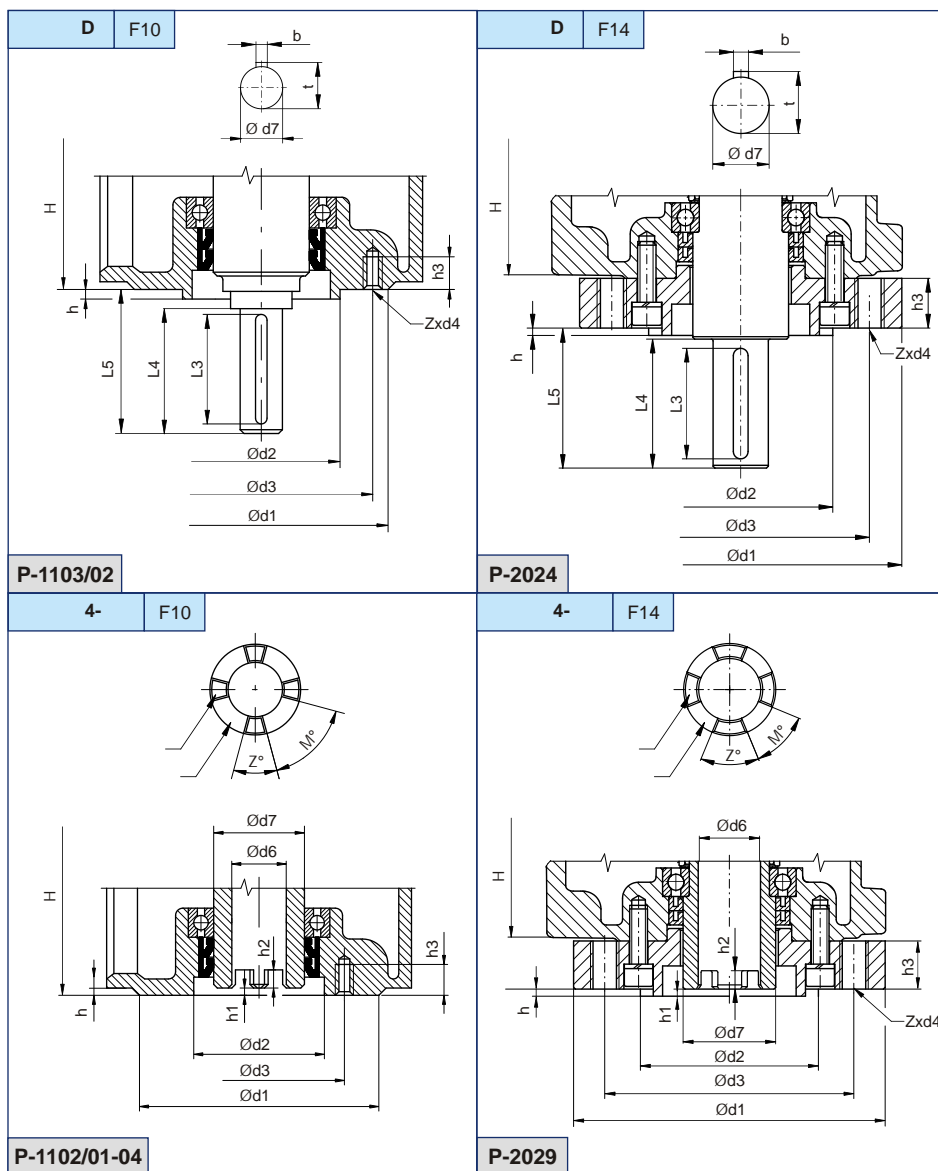

P-2029	4-	F14	-	45°	45°	175	75	140	4xM16	35	52	-	2	10	27	-	-	-	-
P-1103/04	4-	F10	-	45°	45°	125	62	102	4xM10	28	40	-	2	10	20	-	-	-	-
P-1103/03	4-	F10	-	45°	45°	125	62	102	4xM10	28	40	-	2	10	20	-	-	-	-
P-1103/02	4-	F10	-	30°	60°	125	62	102	4xM10	28	40	-	2	10	20	-	-	-	-
P-1103/01	4-	Ø80	-	30°	60°	125	62	80	4xM10	28	40	-	2	10	20	-	-	-	-
P-2024	D	F14	8	-	-	175	100	140	4xM16	-	30	4	-	-	27	63	70	76	33
P-1103/02	D	F10	6	-	-	125	70	102	4xM10	-	20	3	-	-	20	45	70	76	22.5
P-1103/02	D	G0	6	-	-	125	60	102	4xM10	-	20	3	-	-	20	45	70	76	22.5
			b	Z	M	d1	d2	d3	Zxd4	d6	d7	h	h1	h2	h3	L3	L4	L5	t