

REMATIC, DMS3,
 24 V DC (2P)
 (3P).
 : LED ,
 (RS-232).
 a a
 « - ».



DMS3

- 220 VAC
-
-
- ()
- 2 R1, R2 (18)
- READY
- - 0/4 - 20 mA, 4 - 12 mA, 12 - 20 mA 0/2 - 10 V
- 24 V DC - , ,
- 24 V DC - , ,
-
- ESD ()
- - 4 - 20 mA a ()
-
- (, ,)
- RS 232
-
-
-
-
- IP67

STR OPA

430. x - x x x x x / x x

/	o	e	10)	
3.1		-25°C ... +55°C	C3	IP 67 1
		-25°C ... +55°C	C3	IP 68 ¹¹⁾ 5
B2	+	-25°C ... +55°C	C4	IP 67 2
2		-25°C ... +55°C	C3	IP 67 6
1	-	-25°C ÷ +55°C	C4	IP 67 7

		23)		
	50 Hz	230 V AC	Z516 Z517 Z518	0
		220 V AC		L
		24 V AC		3
	60 Hz	240 V AC		V
		120 V AC		T
		110 V AC		B
		24 V AC		J

	32) 35)		33) 35)				
	o	o	50 Hz	60 Hz			
4 500 N	4 000 N	3 200 N	5 mm/min	6 mm/min	A		
4 000 N	3 400 N	2 700 N	10 mm/min	12 mm/min	N		
3 800 N	3 200 N	2 500 N	5 mm/min	6 mm/min	B		
			10 mm/min	12 mm/min	E		
2 400 N	2 000 N	1 600 N	16 mm/min	19 mm/min	P		
1 900 N	1 600 N	1 280 N	5 mm/min	6 mm/min	C		
			10 mm/min	12 mm/min	F		
			16 mm/min	19 mm/min	Q		
			20 mm/min	24 mm/min	H		
950 N	800 N	640 N	5 mm/min	6 mm/min	D		
			10 mm/min	12 mm/min	G		
			16 mm/min	19 mm/min	R		
			20 mm/min	24 mm/min	J		
725 N	630 N	500 N	40 mm/min	48 mm/min	L		
360 N	320 N	250 N	40 mm/min	48 mm/min	M		

10		10 - 28 mm	J
		10 - 40 mm	H

DMS3	2P	24 V DC		-	Z517	F	
	3P/2P	0/4 - 20 mA	24 V DC		4 - 20 mA	Z516	G
		0/2 - 10 V				Z518	H

10) ISO 9223 / EN ISO 12944-2.
 11) IP 68 - 10 / 48
 12) ISO 9223 / EN ISO 12944-2.
 23) " " " " " "
 31) -15 +55°C Un-5% Un+10%.
 32) S2-10 min a S4-25% 90 / /
 33) S4-25% ,90 - 1200 /
 35) 60 Hz 1,2
 62)

STR OPA




430. x - x x x x x / x x

F05 ISO 5210	45 mm	M12x1.25-20	P-2003	A
	66 mm		P-2004/A, C	B
	92.5 mm		P-2004/B, D	G
	85 mm		P-2008/A, C	U
	110 mm		P-2008/B, D	V
	57 mm		P-2010/A, B	Z
	70 mm		P-2010/C	7
	110 mm	M8x1-22	P-2005/A, D	L
	103 mm	M10x1-22	P-2005/B, E	K
	112 mm	M10x1.5-22	P-2006/A, B	M
	102 mm	M12x1.25-22	P-2007/A, B	S
	50 mm	M12-22	P-2009/A, B	W
	62 mm	M14-22	P-2011/A, C	Y
	66 mm	M5-22	P-2011/B, D	C
	53 mm	1/2 - 13 UN	P-2012/A, D	0
	86 mm	3/8 - 16 UN	P-2012/C,F	1
	59 mm	5/16 - 18 UN	P-2012/B,E	2
	94 mm		P-2005/E	3
	124 mm		P-2005/F	4
	59 mm		P-2076	5
4	103 mm		P-2013/A, C	R
	110 mm		P-2013/B, D	T
	66 mm		P-2014/A, B	D

A		0	1
---	--	---	---


DB-9F/RJ45	224A80100
	224763601

STR OPA

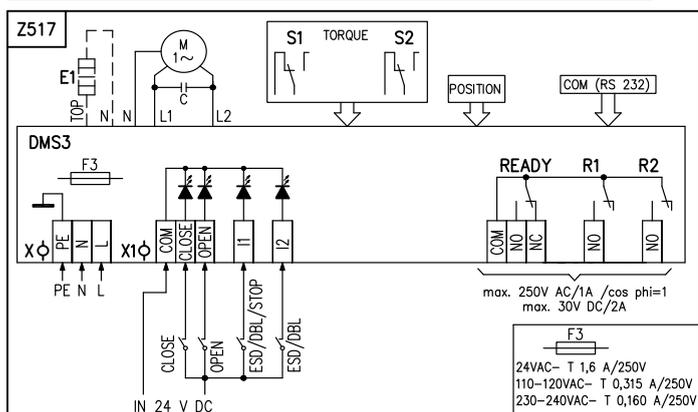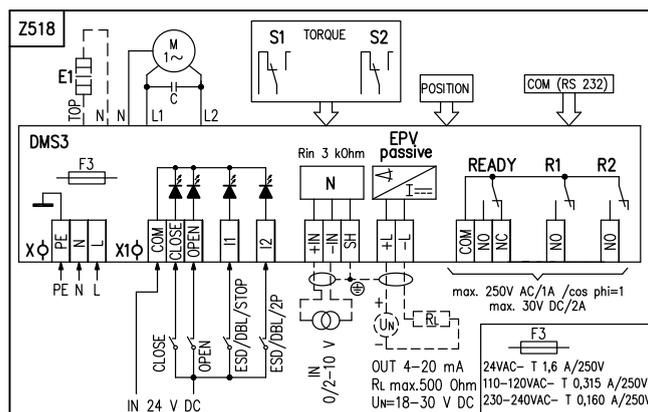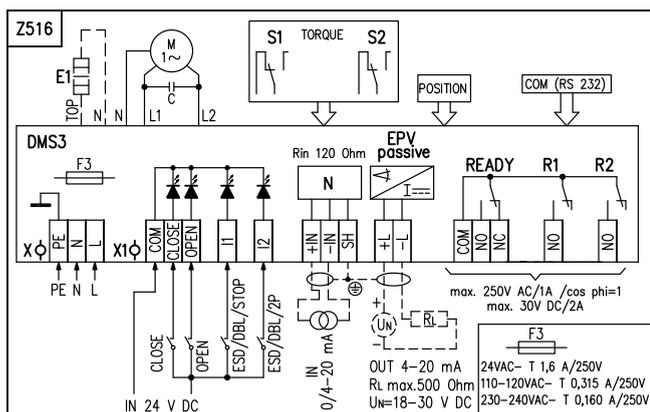


1. N, L 230V AC, 24 V AC ()

STR OPA

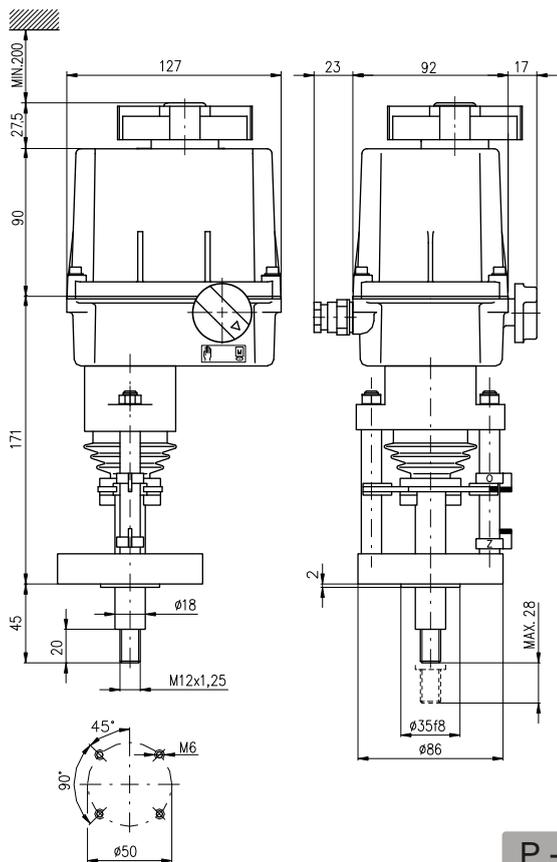


P - 2003

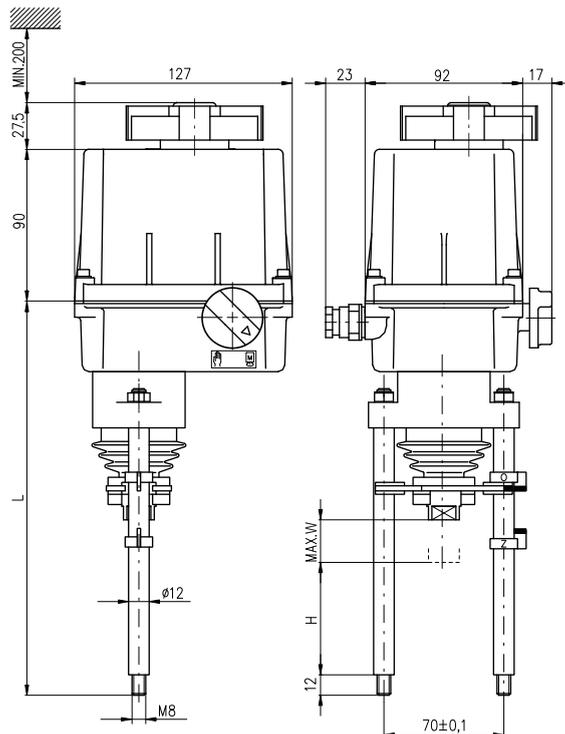


P-2004/D	92,5	294	40
P-2004/C	66	267,5	40
P-2004/B	92,5	264	28
P-2004/A	66	237,5	28
	H	L	W

P - 2004

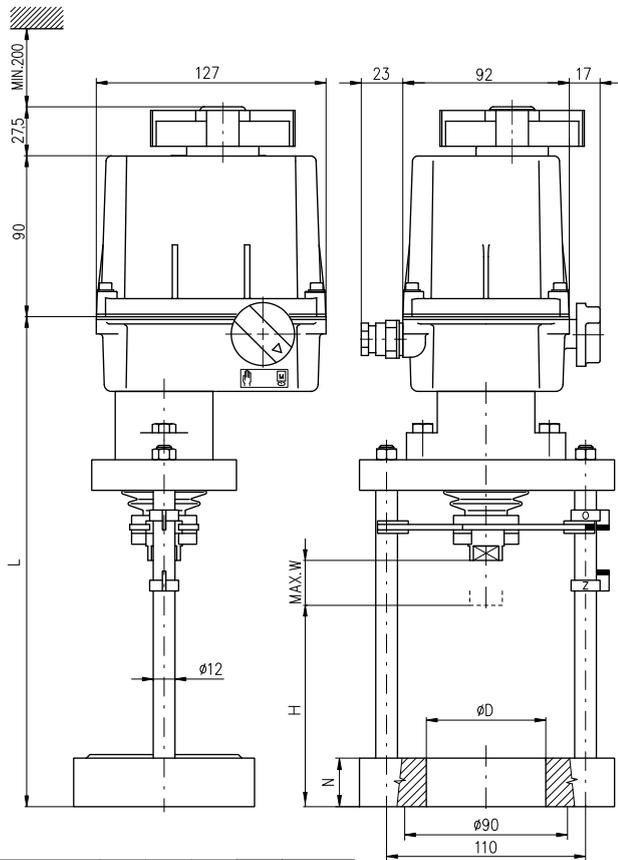


P-2005/F	124	40	301,5	25	58
P-2005/D	110		301,5	25	65,15H7
P-2005/E	94		255,5	18	58
P-2005/B	103	28	264,5	25	65,15H7
P-2005/A	110		271,5		
	H	W	L	N	ØD

P - 2005

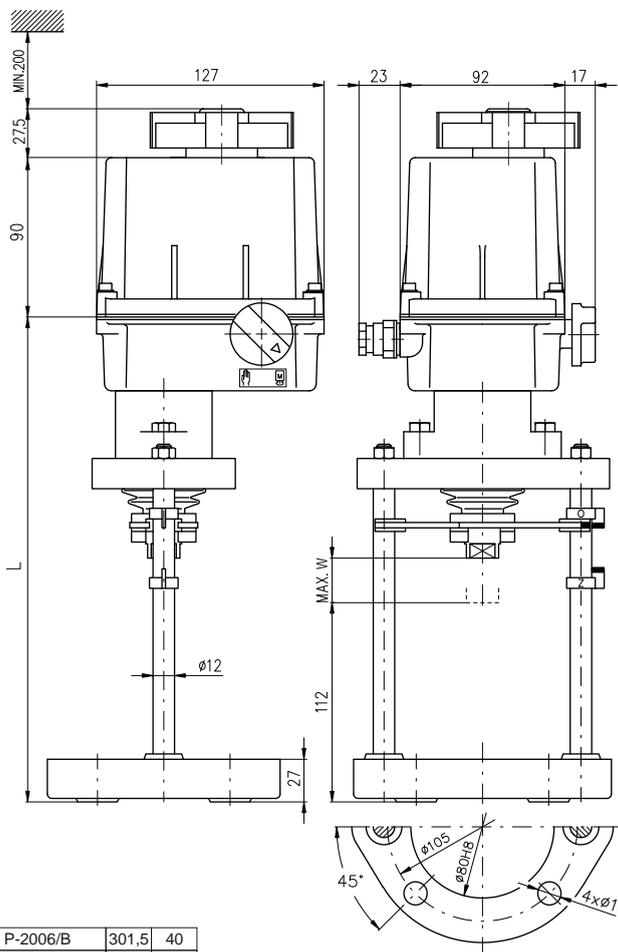


P-2006/B	301,5	40
P-2006/A	271,5	28
	L	W

P - 2006

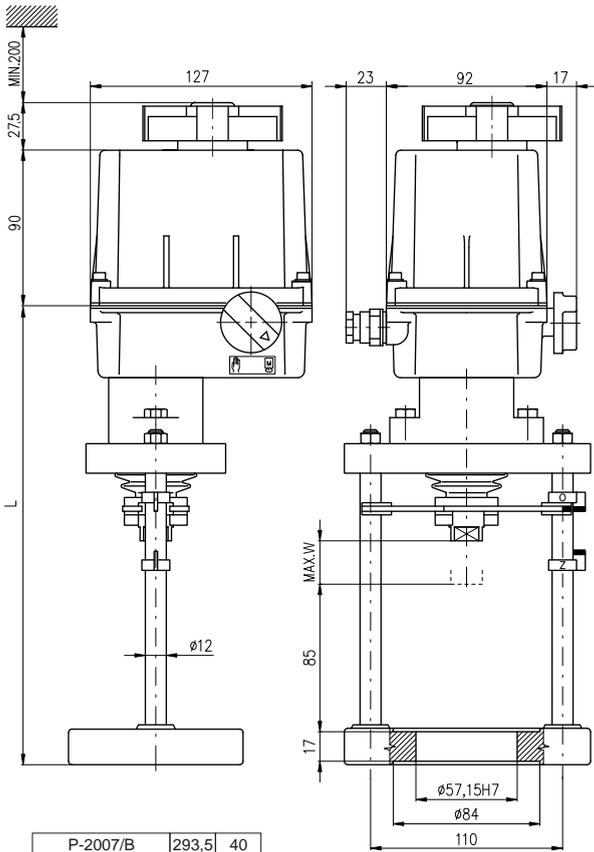


P-2007/B	293,5	40
P-2007/A	263,5	28
	L	W

P - 2007

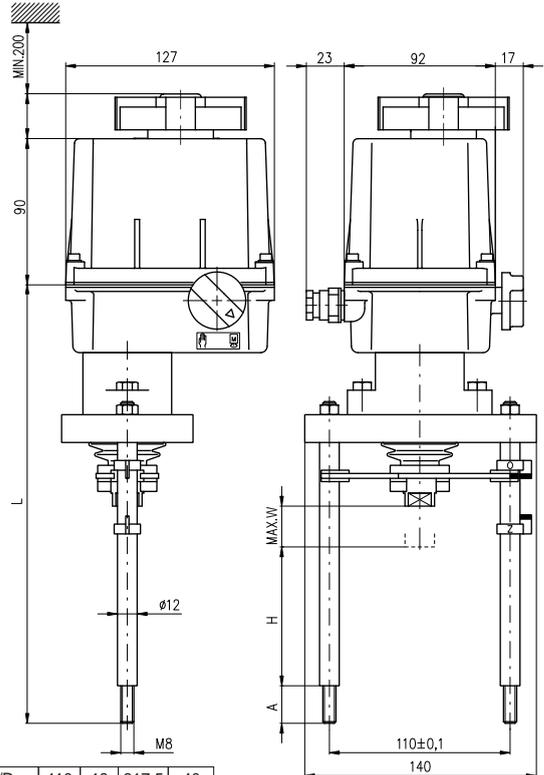


P-2008/D	110	18	317,5	40
P-2008/C	85	23	297,5	40
P-2008/B	110	18	287,5	28
P-2008/A	85	23	267,5	28
	H	A	L	W

P - 2008

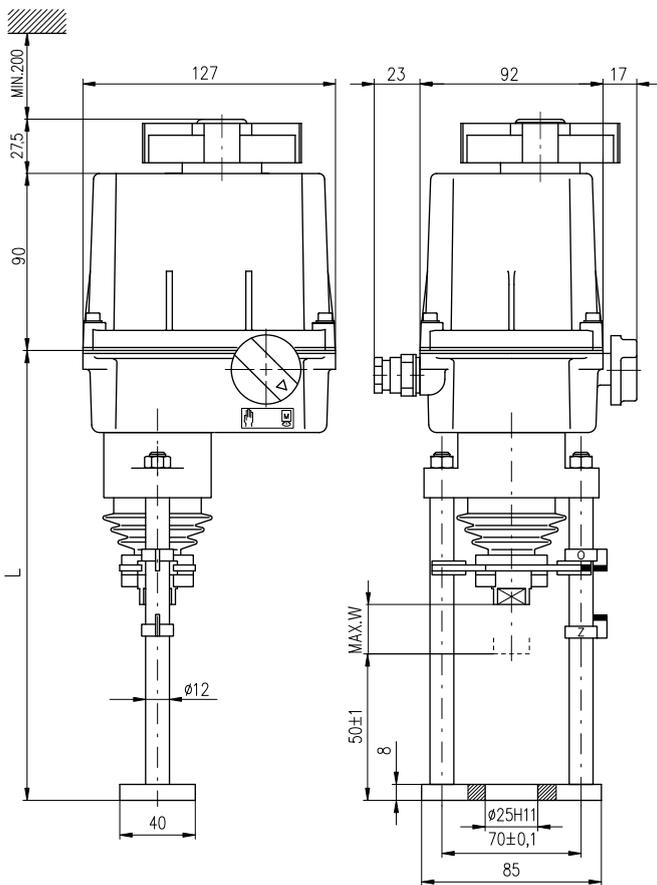


P-2009/B	239,5	40
P-2009/A	209,5	28
	L	W

P - 2009

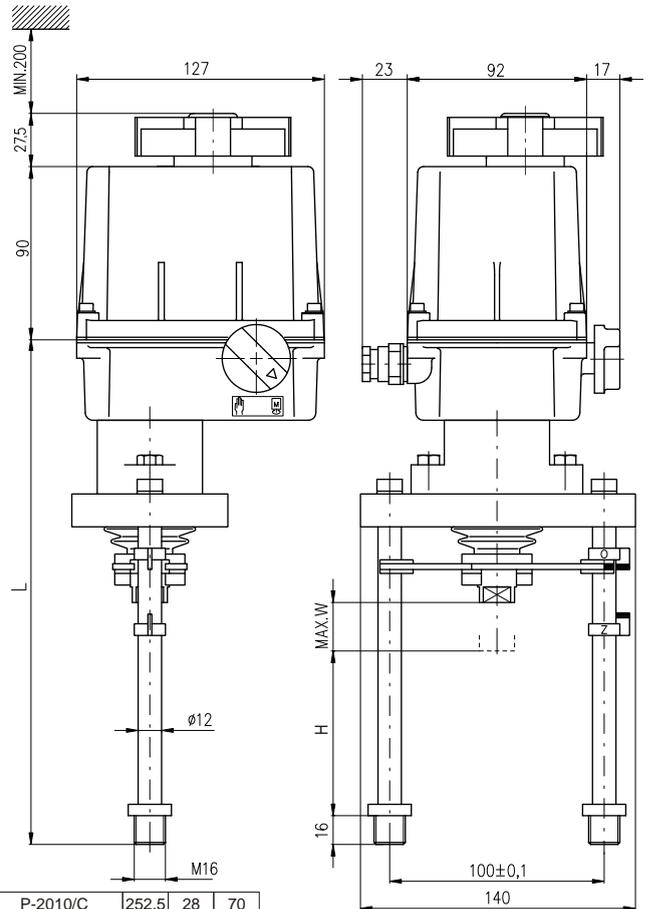


P-2010/C	252,5	28	70
P-2010/B	269,5	40	57
P-2010/A	239,5	28	57
	L	W	H

P - 2010

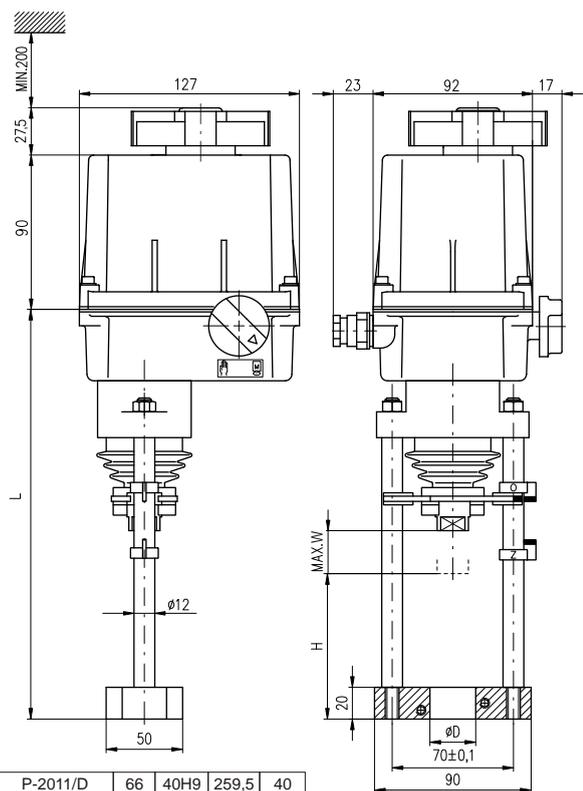


P-2011/D	66	40H9	259,5	40
P-2011/C	62	32H9	257,5	40
P-2011/B	66	40H9	229,5	28
P-2011/A	62	32H9	227,5	28
	H	ØD	L	W

P - 2011

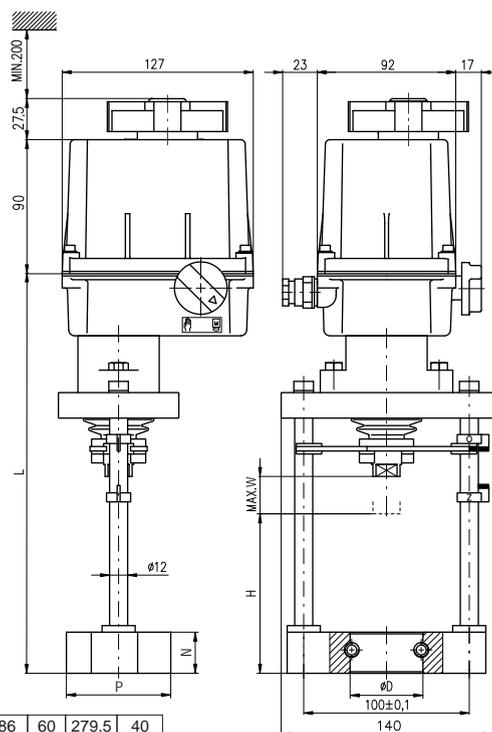


P-2012/F	86	60	279,5	40
P-2012/E	59	38	252,5	40
P-2012/D	53	44	246,5	40
P-2012/C	86	60	249,5	28
P-2012/B	59	38	222,5	28
P-2012/A	53	44	216,5	28
	H	ØD	L	W

P - 2012

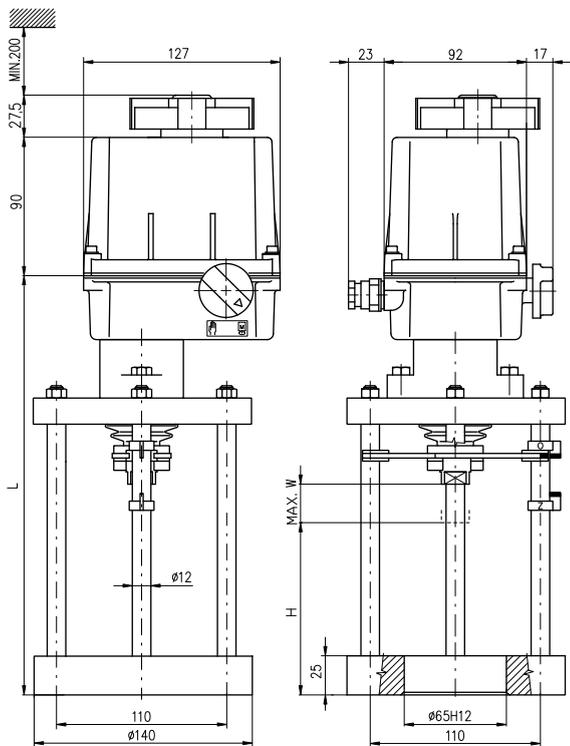


P-2013/D	110	301,5	40
P-2013/C	103	294,5	40
P-2013/B	110	271,5	28
P-2013/A	103	264,5	28
	H	L	W

P - 2013

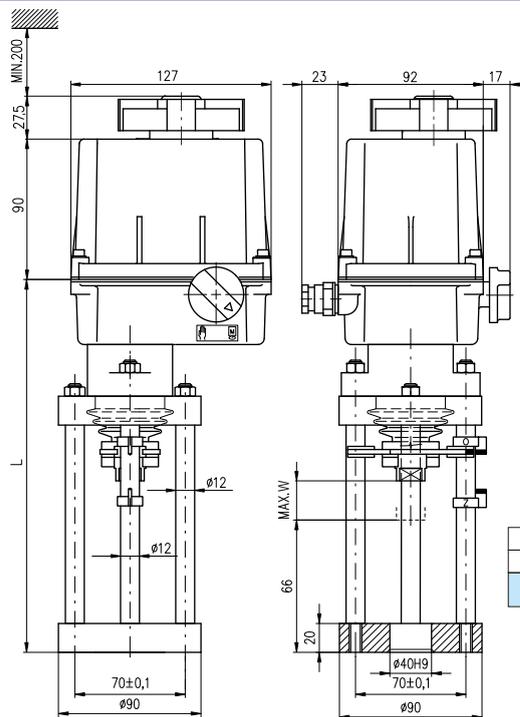

P-2014/B	257,5	40
P-2014/A	222,5	28
	L	W


P - 2014



M8x1-22	
M10x1-22	
M10x1.5-22	
M12x1.25-22	
M12-22	
M14-22	
M5-22	1/2" - 13 UN
W5/16"-22	3/8" - 16 UN
W5/8"-22	5/16" - 18 UN
	Z

o RV 113M

D= 12; DN= 15 - 80; p = 20 mm

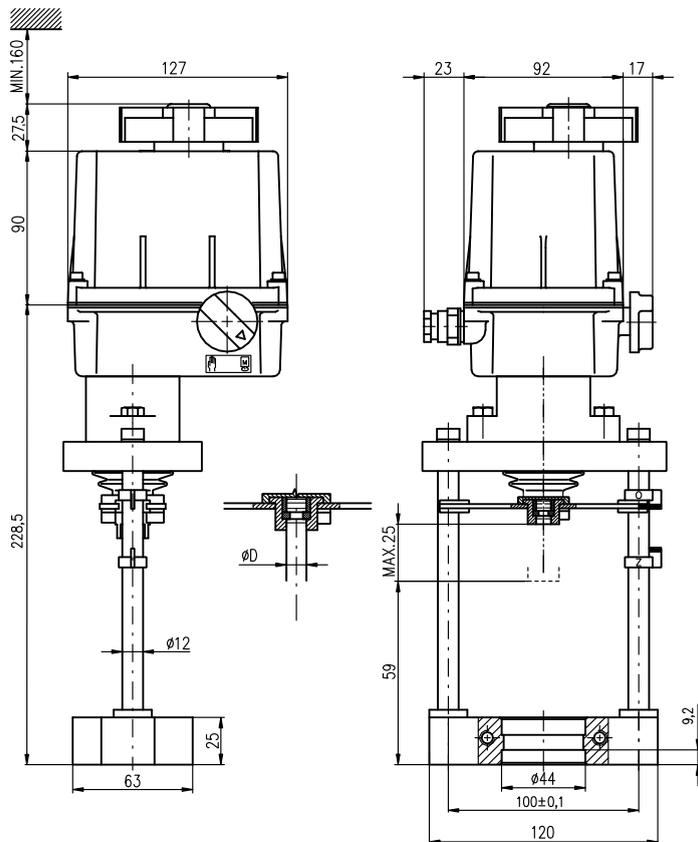

P - 2076